

NOTES

- 1

PAINT NEW AND EXISTING WALLS.
- 2

DO NOT PAINT EXISTING MARBLE OR MURALS.
CLEAN ALL MARBLE.
- 3A

PROVIDE NEW SUSPENDED ACOUSTICAL CEILING.
- 3


PROVIDE NEW DOOR AND FRAME.
- 4

PAINT EXISTING CEILING.
- 5

EXISTING ACOUSTICAL CEILING TO REMAIN. REFER TO ALTERNATES.
- 6

PAINT EXISTING FLOOR AND STAIR TREADS/RISSERS WITH ALKALD CONCRETE FLOOR PAINT.
- 7

ALL NEW FLOOR COVERINGS AND NEW WALL BASES WILL BE PROVIDED BY OWNER UNDER SEPARATE CONTRACT.

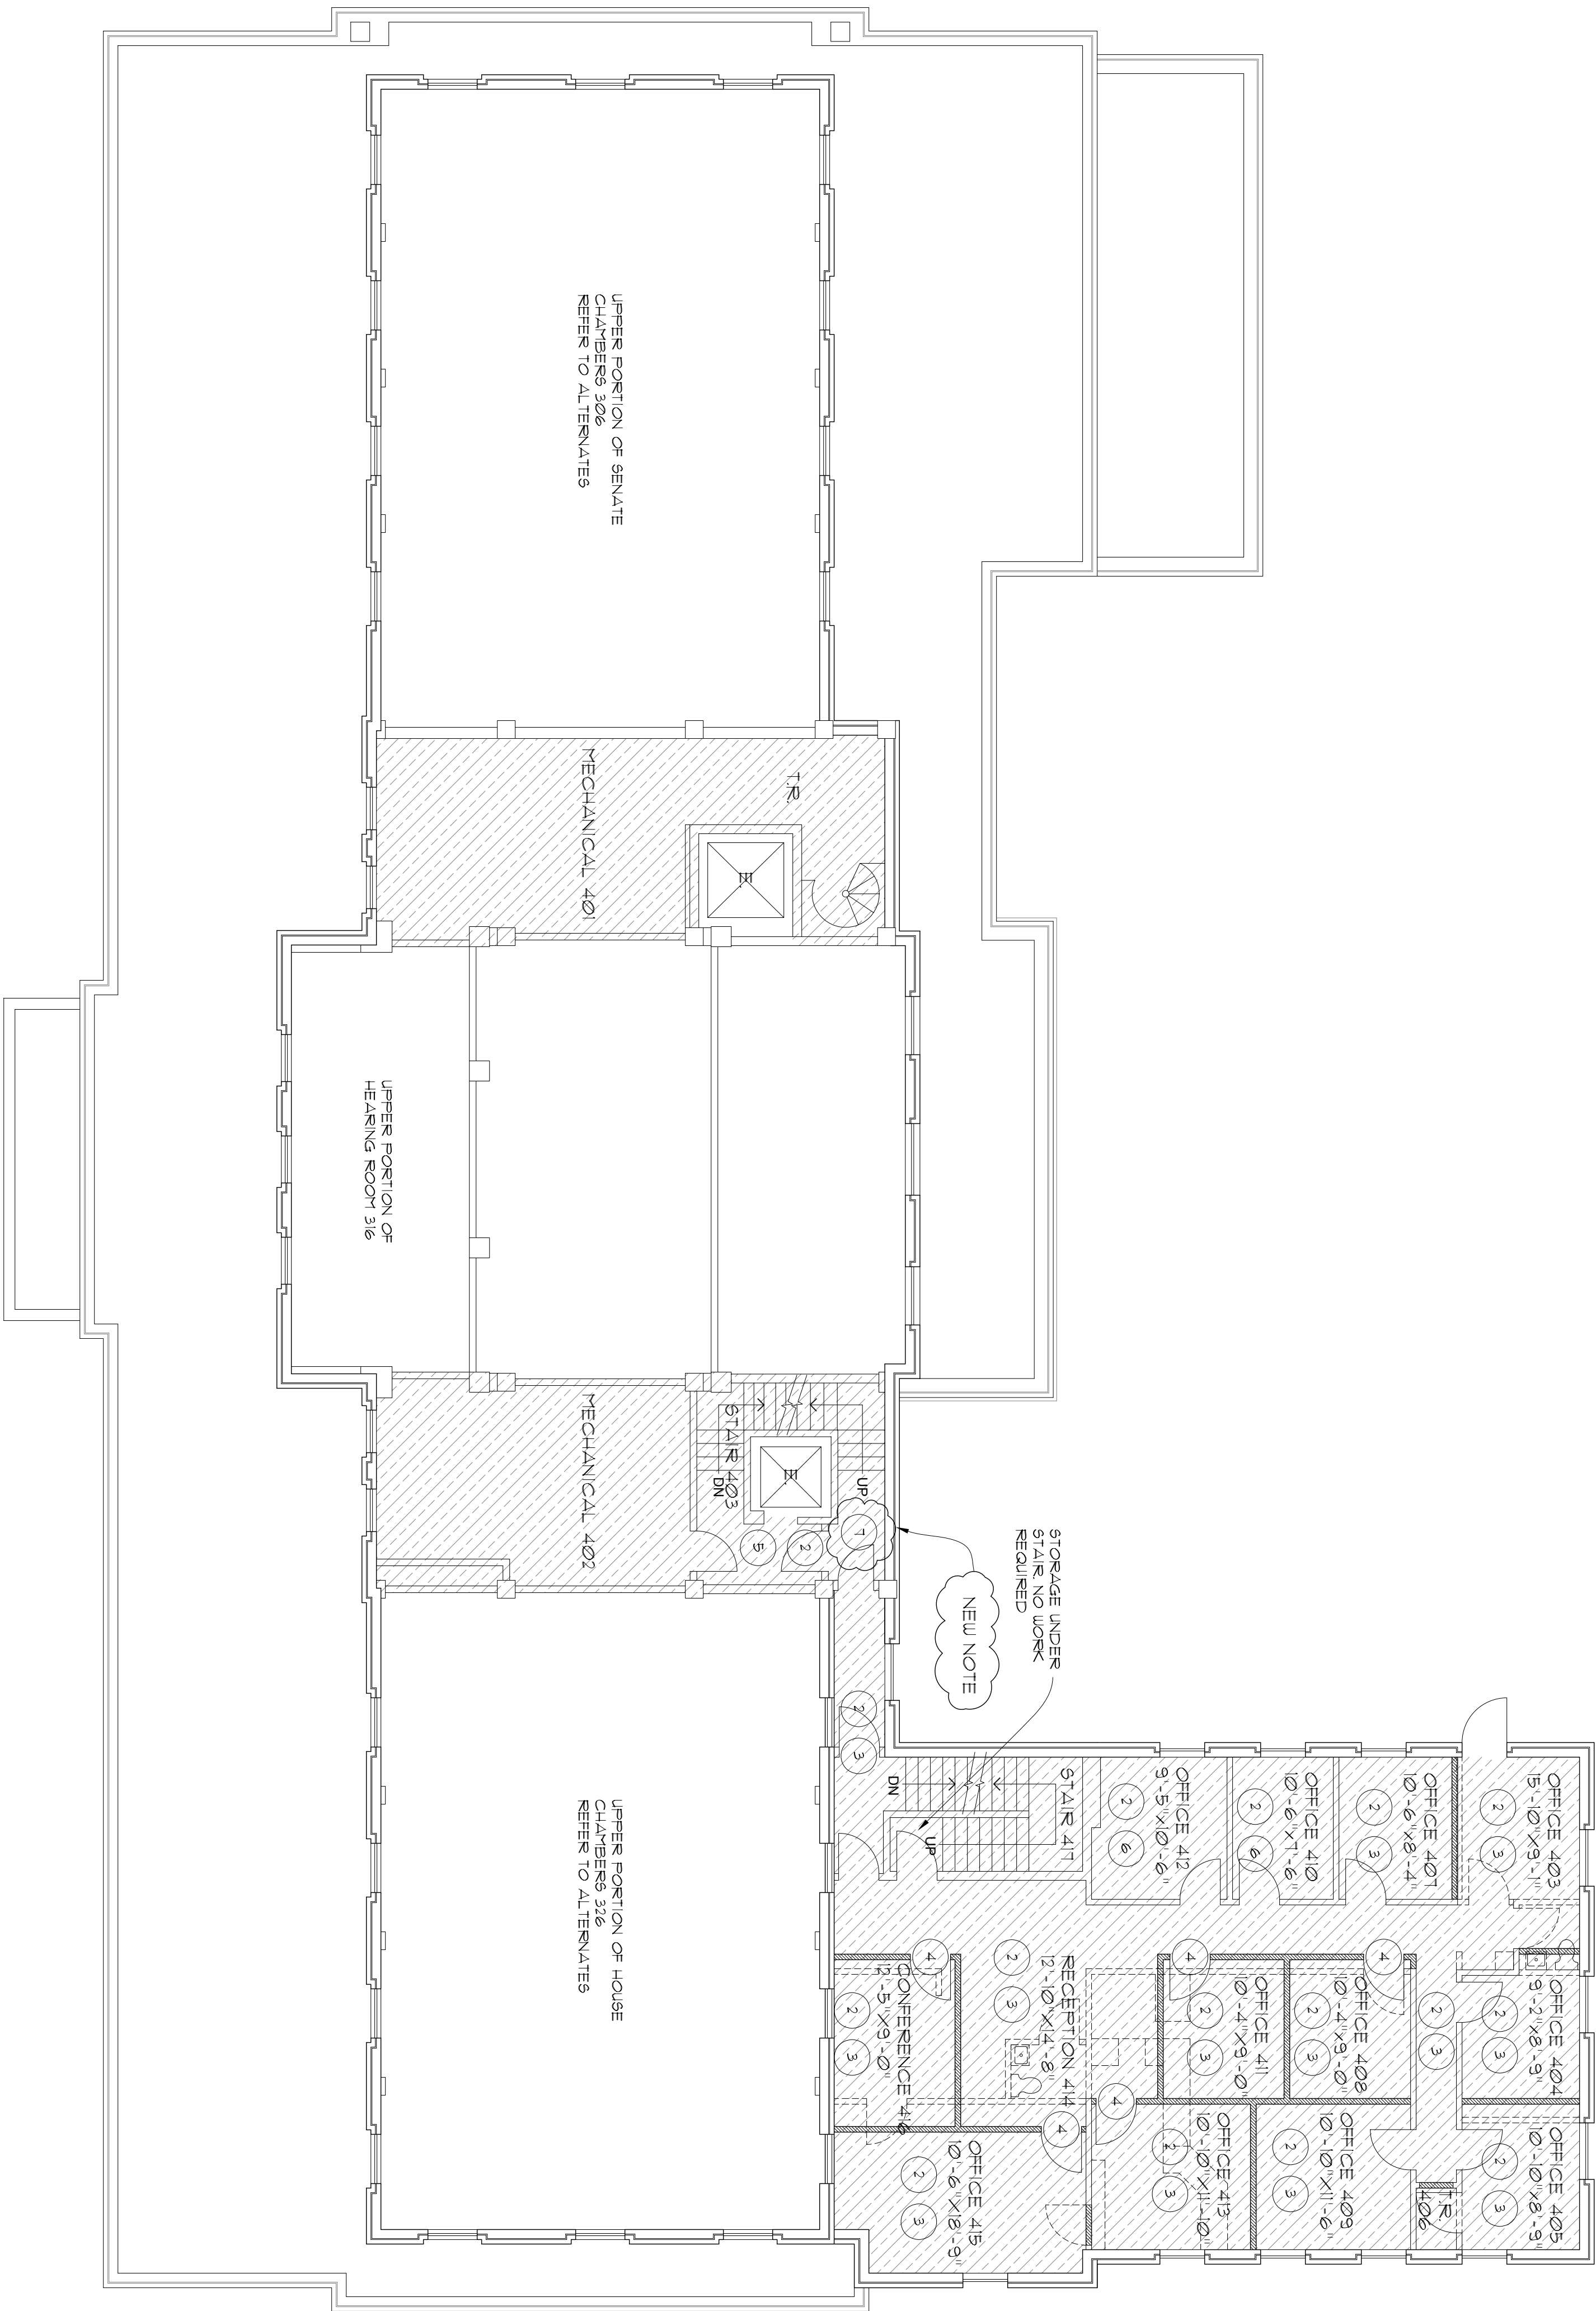


LEGEND

- EXISTING WALLS
TO BE REMOVED
- NO WORK REQUIRED
- NEW WALLS
- PHASE 1 WORK AREA
- PHASE 2 WORK AREA

GENERAL NOTE:
SOME ASBESTOS CONTAINING MATERIALS (ACM) REMAINS UNDER EXISTING WALLS TO BE REMOVED. DBT SHALL COORDINATE WITH OWNER'S ASBESTOS CONTRACTOR TO REMOVE SUCH ACM AT OWNER'S EXPENSE AFTER WALLS ARE REMOVED BY DBT. OWNER INSURES 48 HOUR RESPONSE TIME BY ASBESTOS CONTRACTOR.

REMODELED CONDITION
FOURTH FLOOR PLAN

0 5 10 20



NOTE: ITEMS REVISED PER
ADDENDUM NO. 3 ARE
CLOUDED

REQUEST FOR DESIGN/BUILD
PROPOSALS

DPW Project No. 07011
CAPITAL ANNEX / SWING SPACE REMODEL
514 W. JEFFERSON STREET
(OLD ADA COUNTY COURTHOUSE BUILDING)
BOISE, IDAHO

A5.0

DATE: 9/12/2006
REVISED PER
ADDENDUM NO. 3