

NOTES

- 1

PAINT NEW AND EXISTING WALLS.
- 2

DO NOT PAINT EXISTING MARBLE OR MURALS.
- 3A

CLEAN ALL MARBLE.
- 3

PROVIDE NEW SUSPENDED ACOUSTICAL CEILING.
- 4


PROVIDE NEW DOOR AND FRAME.
- 5

PAINT EXISTING CEILINGS.
- 6

EXISTING ACOUSTICAL CEILING TO REMAIN. REFER TO ALTERNATES.
- 7

PAINT EXISTING FLOOR AND STAIR TREADS/RISSERS WITH ALKALD CONCRETE FLOOR PAINT.
- NEW NOTE

ALL NEW FLOOR COVERINGS AND NEW WALL BASES WILL BE PROVIDED BY OWNER UNDER SEPARATE CONTRACT.

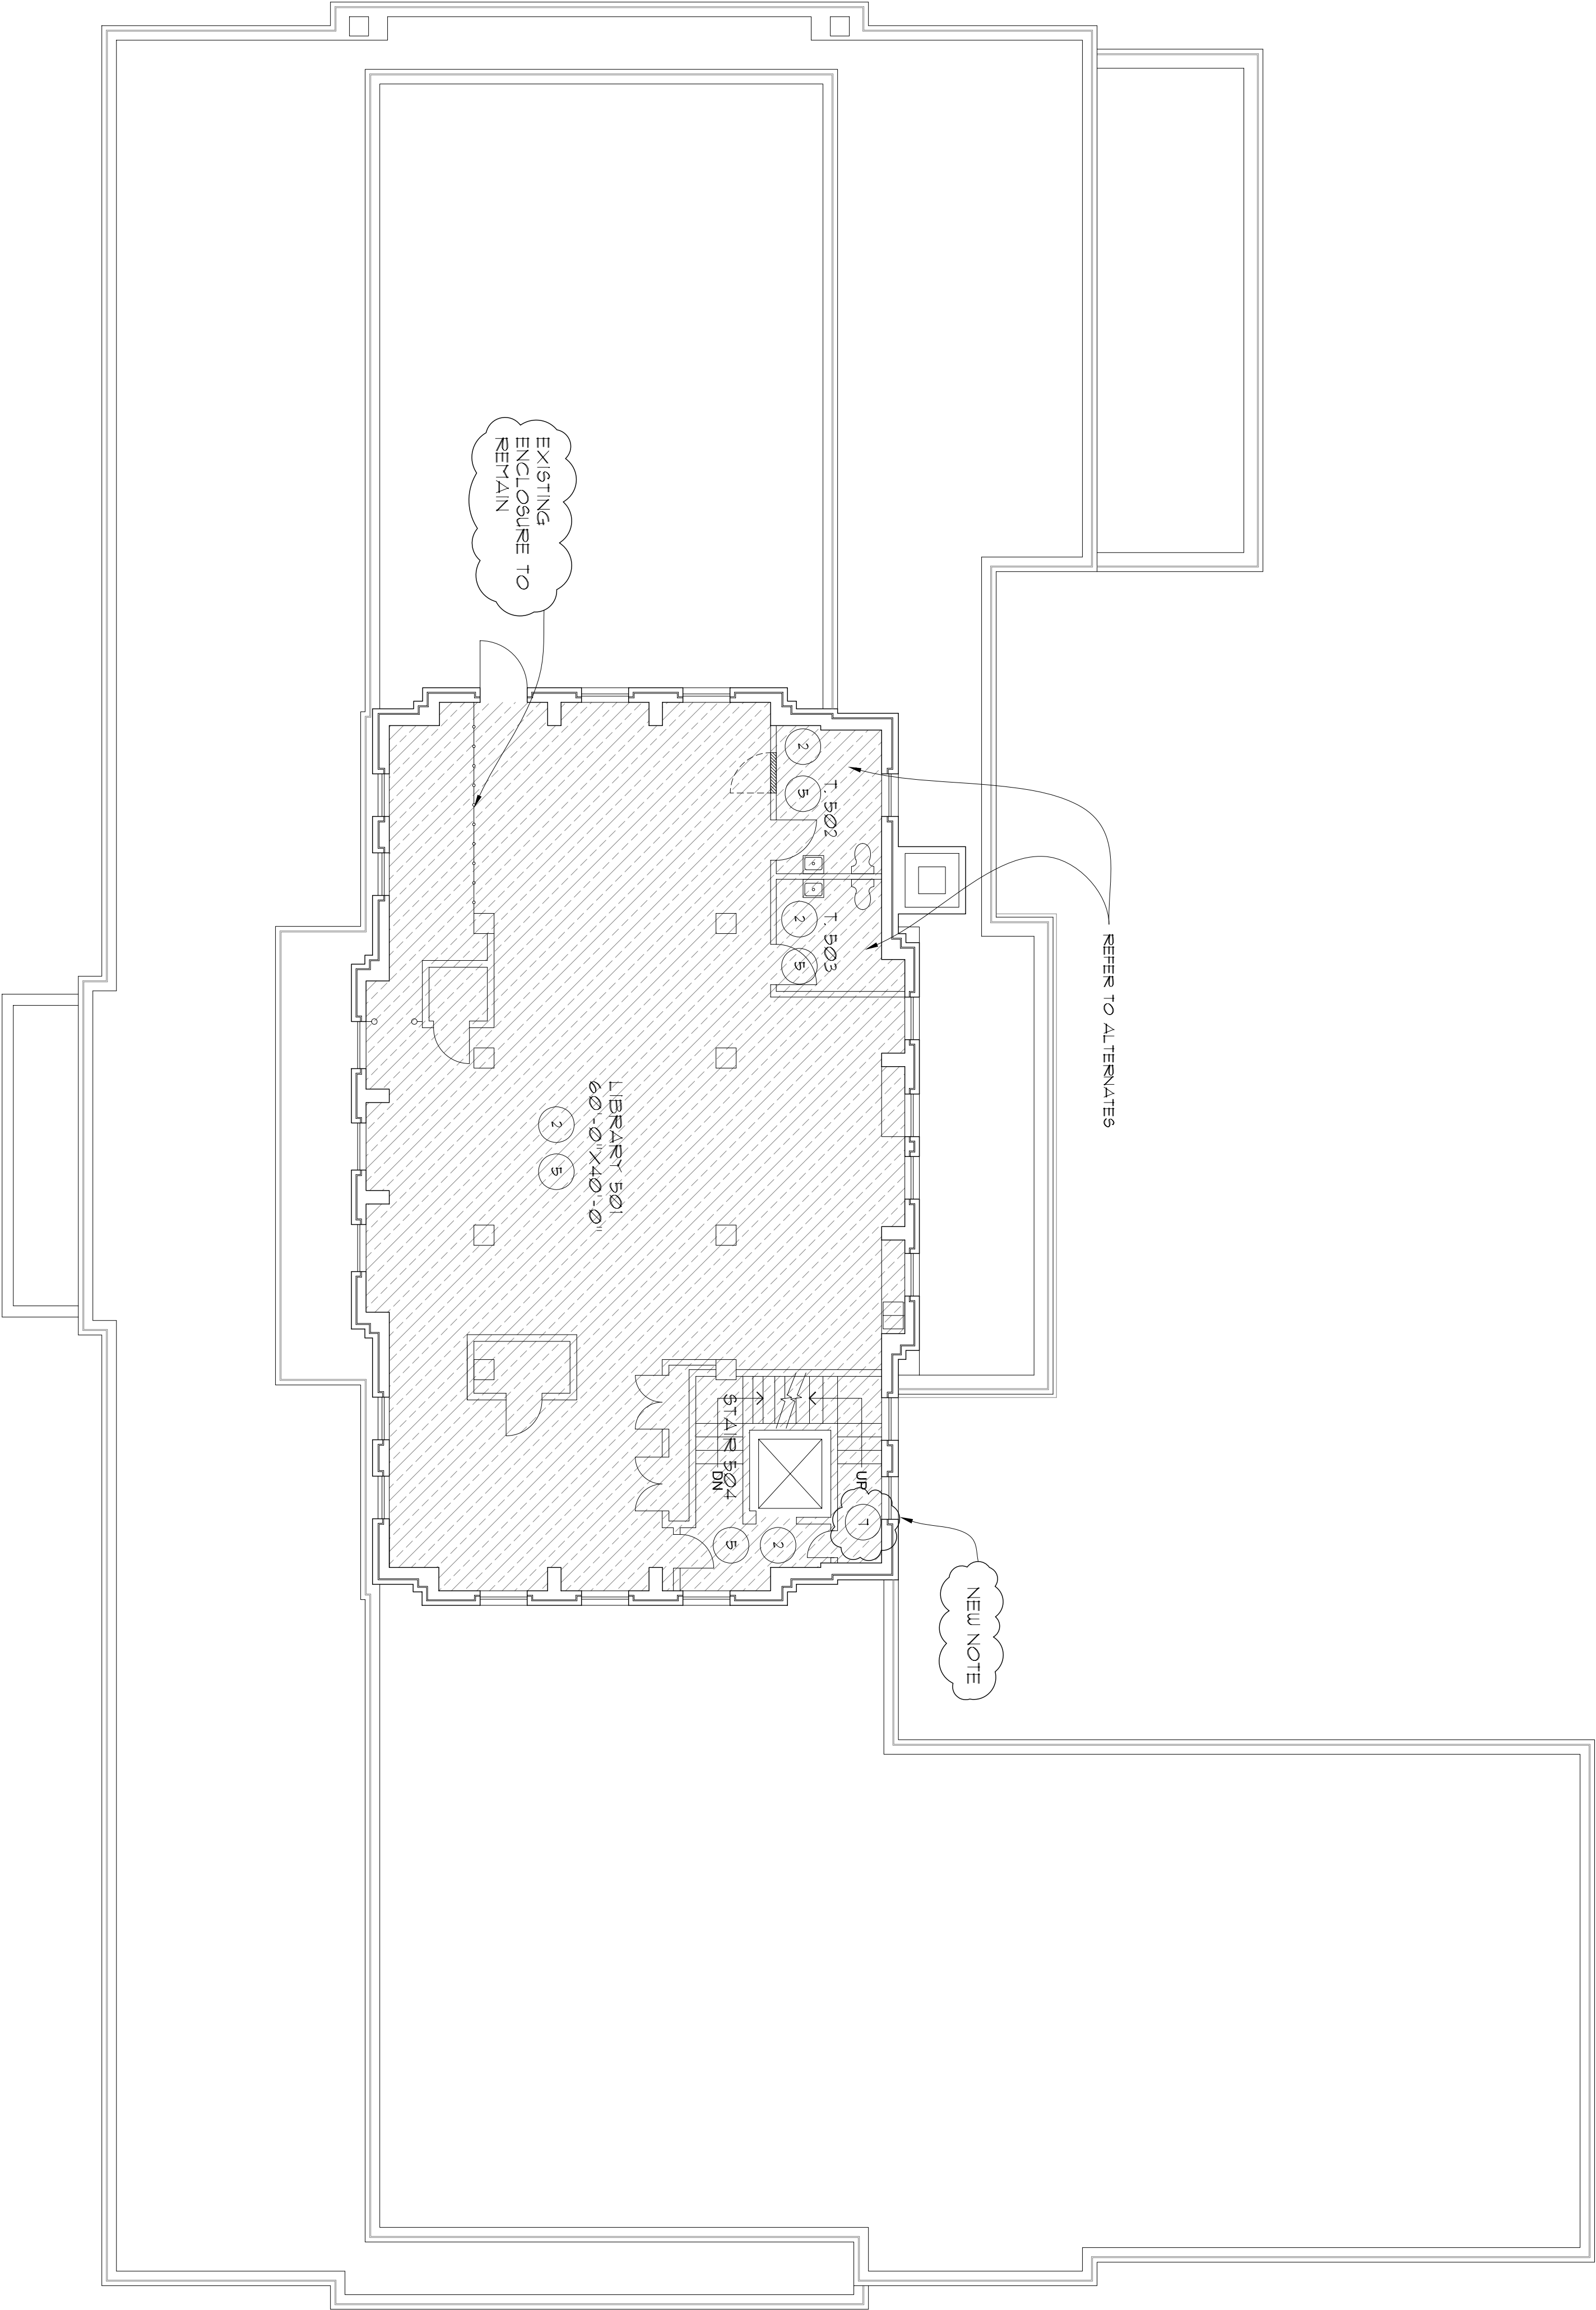

LEGEND

- EXISTING WALLS TO BE REMOVED

NO WORK REQUIRED

PHASE 1 WORK AREA

PHASE 2 WORK AREA

NEW WALLS

GENERAL NOTE:  
SOME ASBESTOS CONTAINING MATERIALS (ACM) REMAINS UNDER EXISTING WALLS TO BE REMOVED. DBT SHALL COORDINATE WITH OWNER'S ABATEMENT CONTRACTOR TO REMOVE SUCH ACM AT OWNER'S EXPENSE AFTER WALLS ARE REMOVED BY DBT. OWNER INSURES 48 HOUR RESPONSE TIME BY ABATEMENT CONTRACTOR.

REMODELED CONDITION  
FIFTH FLOOR PLAN

0

5

10

20

NORTH

NOTE: ITEM'S REVISED PER ADDENDUM NO. 3 ARE CLOUDED

DATE: 9/12/2006  
REVISED PER  
ADDENDUM NO. 3

REQUEST FOR DESIGN/BUILD PROPOSALS

DPW Project No. 07011  
CAPITAL ANNEX / SWING SPACE REMODEL  
514 W. JEFFERSON STREET  
(OLD ADA COUNTY COURTHOUSE BUILDING)  
BOISE, IDAHO

A6.0